【X431Pro Function】 2014 Maserati M156C zero maintenance lamp operation method

# Attention

1.Park your car on the level surface. The installed sensor is very sensitive to the tilt of the vehicle, Otherwise, it will display an error measurement tolerance.

2. Gear selector in the P mode in car position.

3.After running the engine, waiting for 10min until all vehicle run indicator reach stable. The sensor signals used at this time will give the correct output.

# Operation instructions

1. Switch on the ignition ;
2. Select European;
3. Select Maserati V10.02 above , see picture 1;

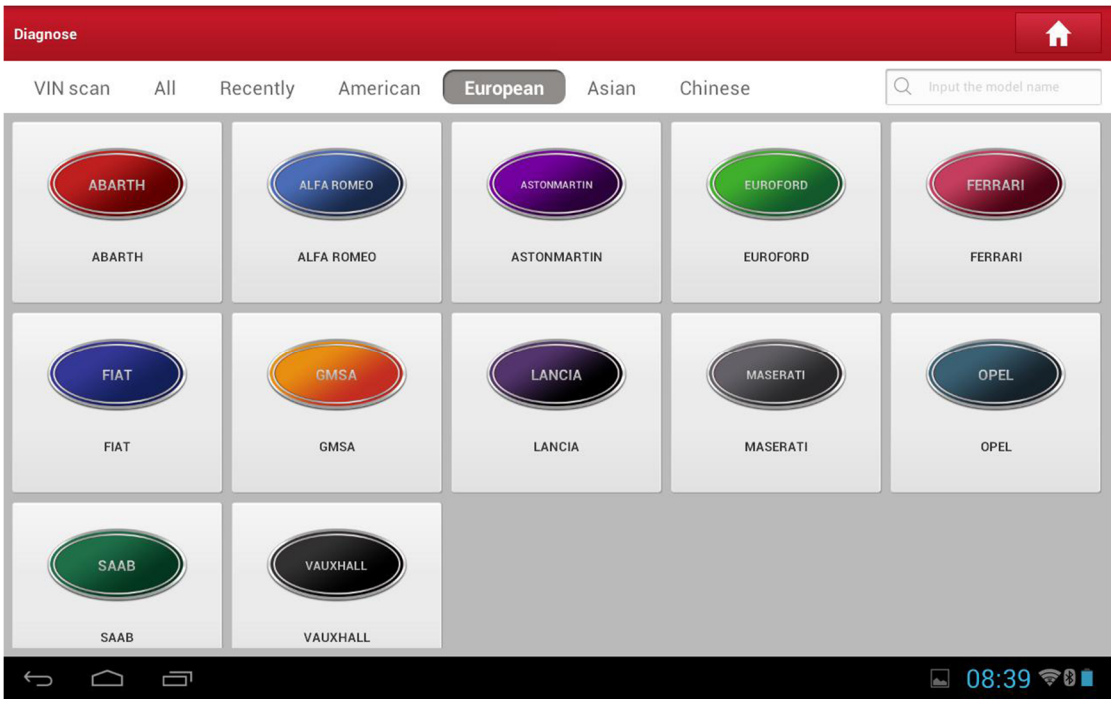

4.Select “QUATTROPORTE”, see picture2;

4. Select M156,see picture3;

6.Select gasoline, see picture 4;

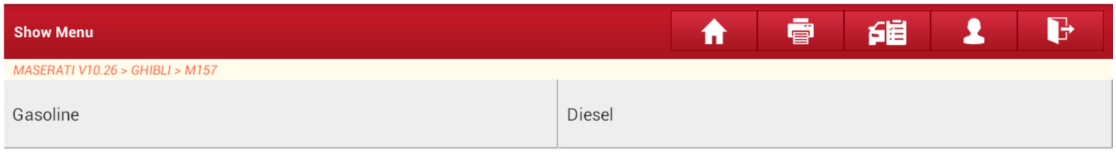

7.Select system scan, see picture 5;

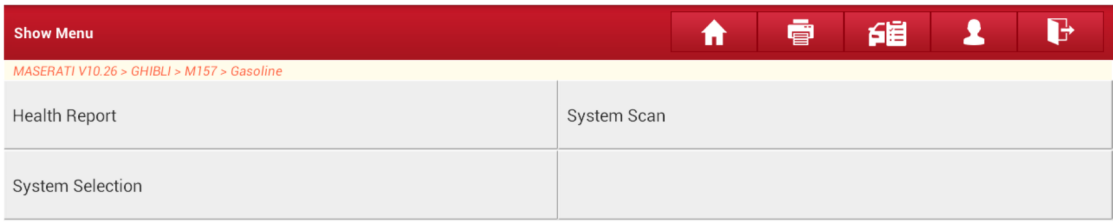

# 【X431Pro Function】 2014 Maserati M156C zero maintenance lamp operation method

8.Select IPC-Dashboard, see picture6;

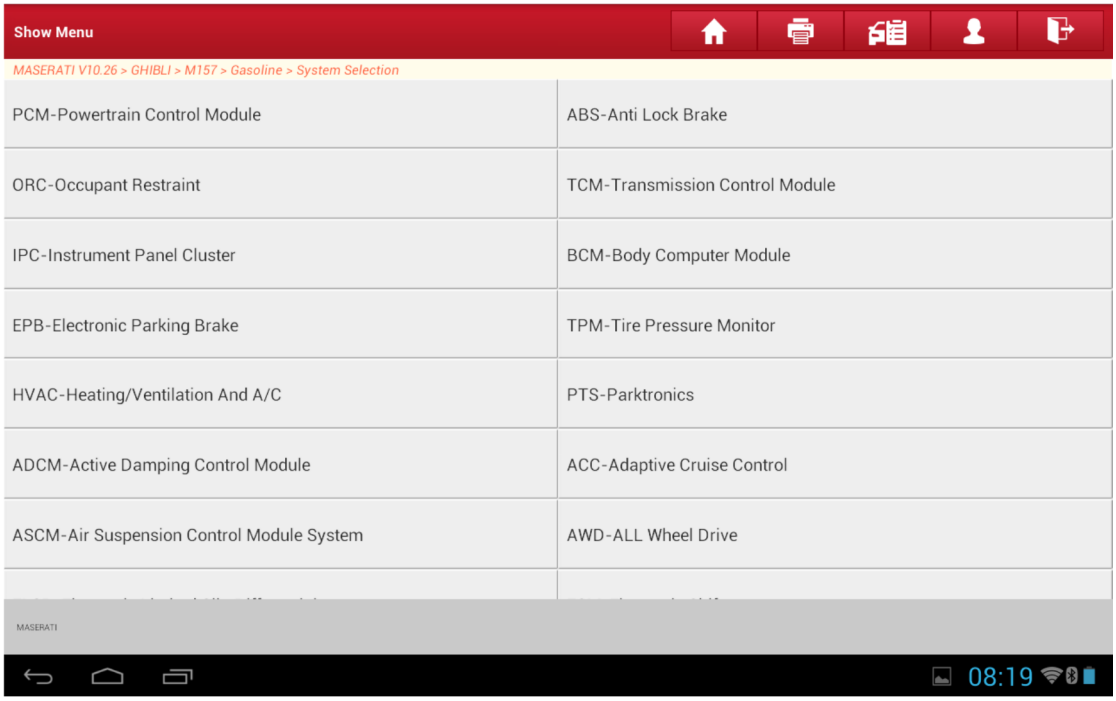


9.Read ECU information, Select “Yes”

10.Select special function, see picture 7;

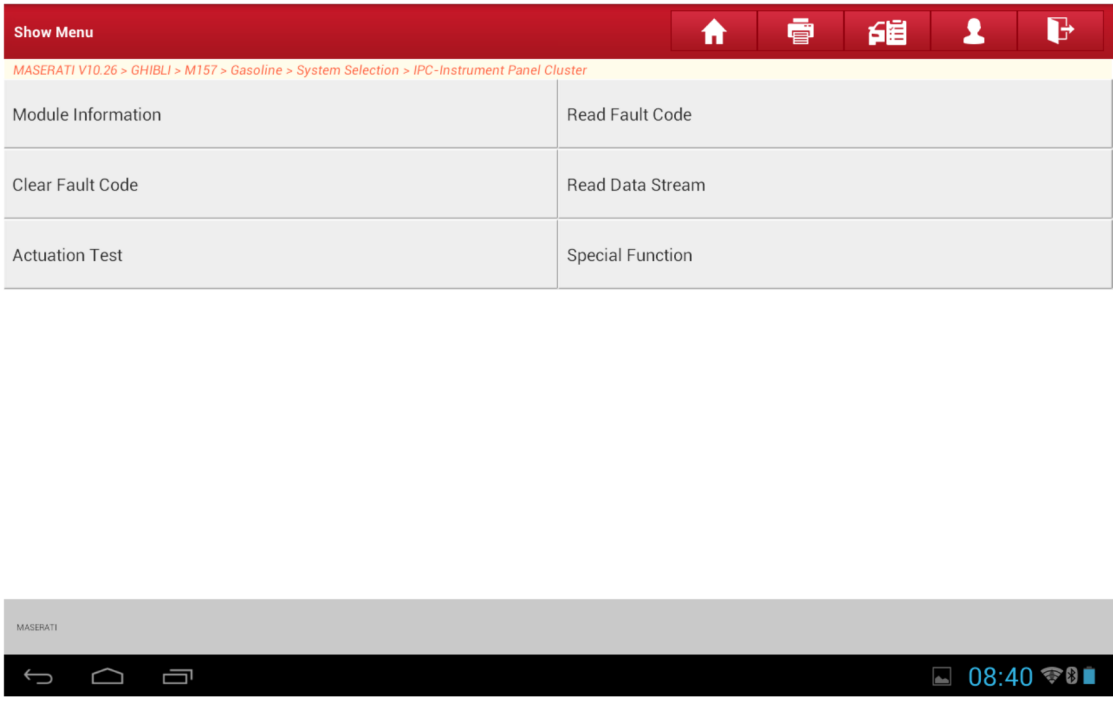

11.Select “reset”， see picture 8;

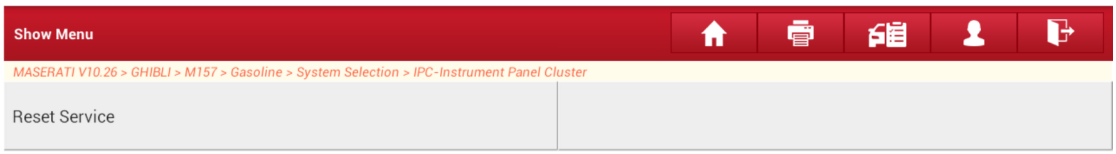

12.Note the “reset” prompt information ,ensure correctly set the date of the dashbord,see picture 9;

# 【X431Pro Function】 2014 Maserati M156C zero maintenance lamp operation method

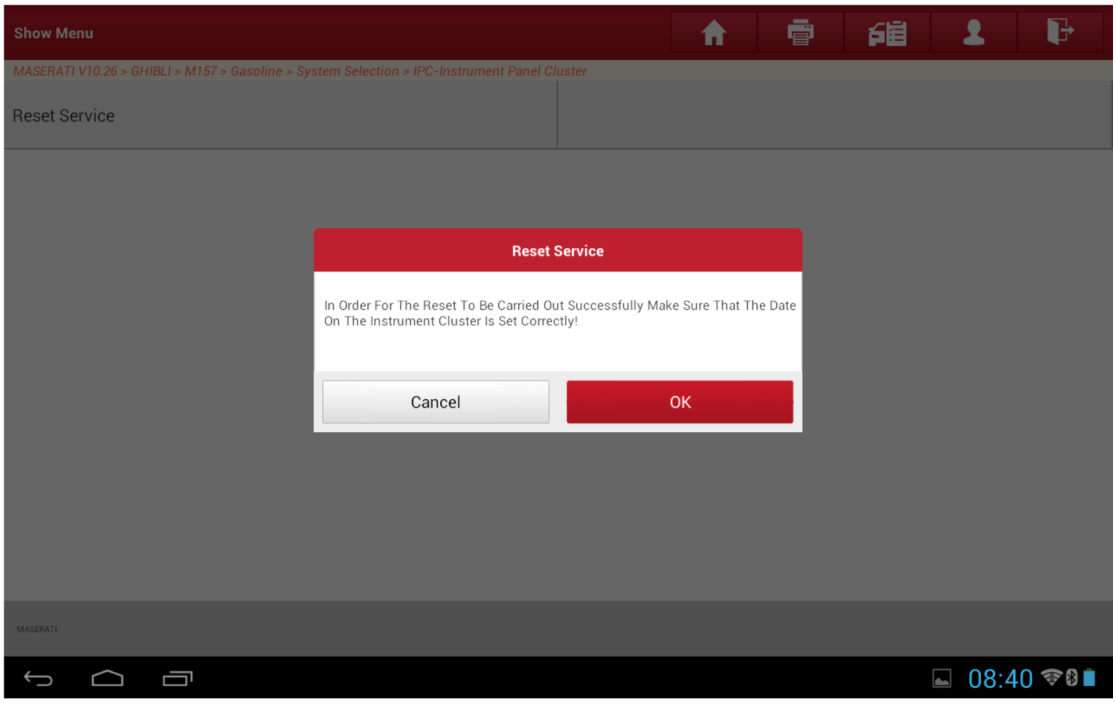

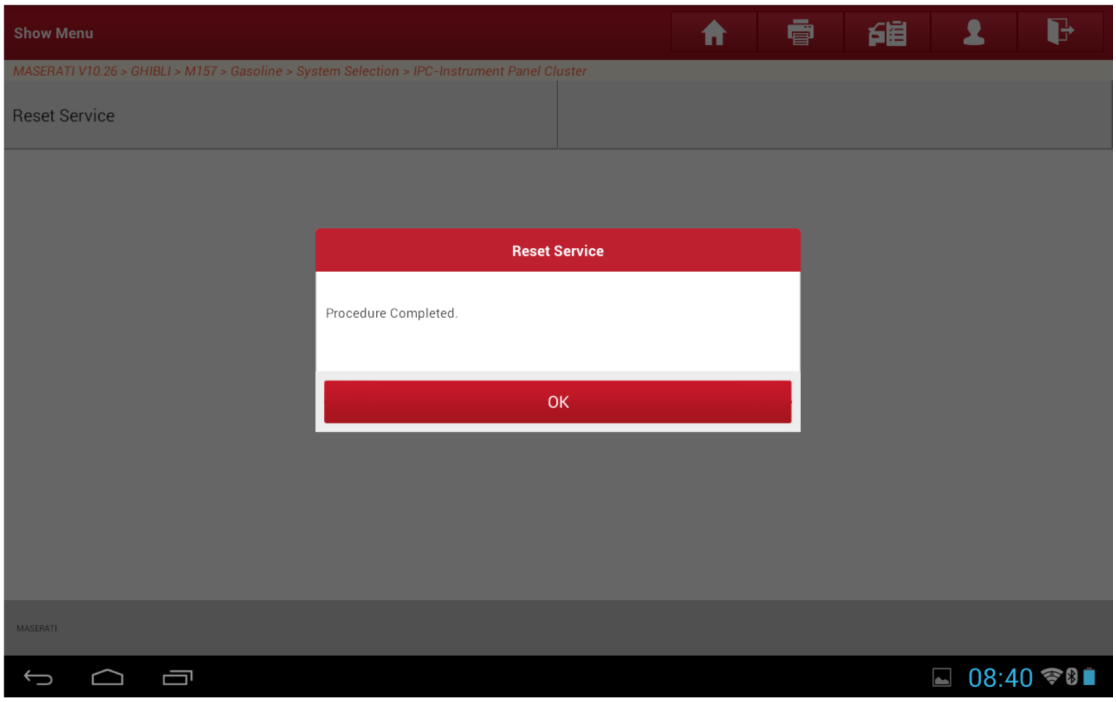
13.After confirm,prompt program is finished,see picture10,operation end.