

Product model	Date	Number:
X-431 Pro series	20160121	—

X-431 Pro Actual Measurement: Operation Method for Service Lamp Reset of 2012 Maserati GRANTURISMO M145

Actual Measured Vehicle Model:

Maserati GRANTURISMO M145, 2012 model, VIN=ZAMKL45E9C00*****



Figure 1

Actual Measurement Operator:

Technician Liu, 1380279232*, Dingyi Automobile Repair Plant, Yuexiu District, Guangzhou City.



Figure 2

Precautions:


1. Park the vehicle on a level surface. The installed sensor is very sensitive to the tilt of the vehicle, otherwise an incorrect measurement error will be displayed because the vehicle is not level.
2. The gear selector must be in P position.
3. After the engine runs, wait 10 minutes for making various vehicle operating indexes stable. After this time, the used individual sensor signal will give out the correct output.

Operating Instructions:


1. Turn the ignition to ON;
2. Select Europe;
3. Select the Maserati V10.03;




4. Select the GRANTURISMO model;

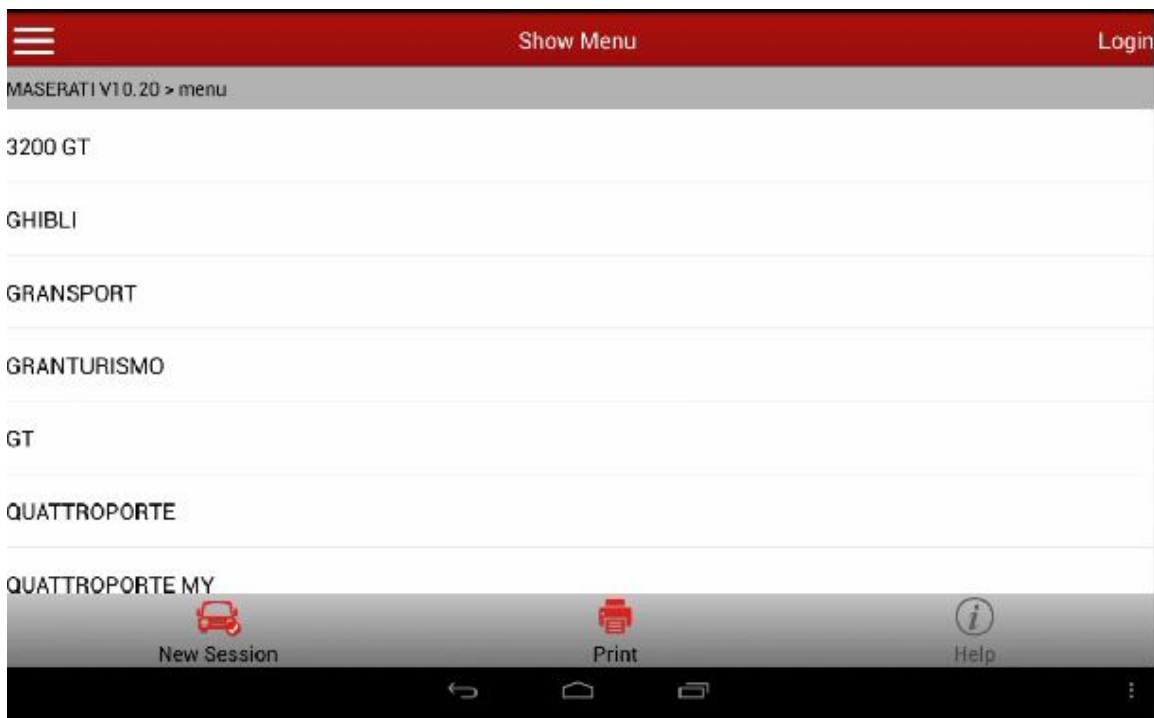


5. Select the M145;

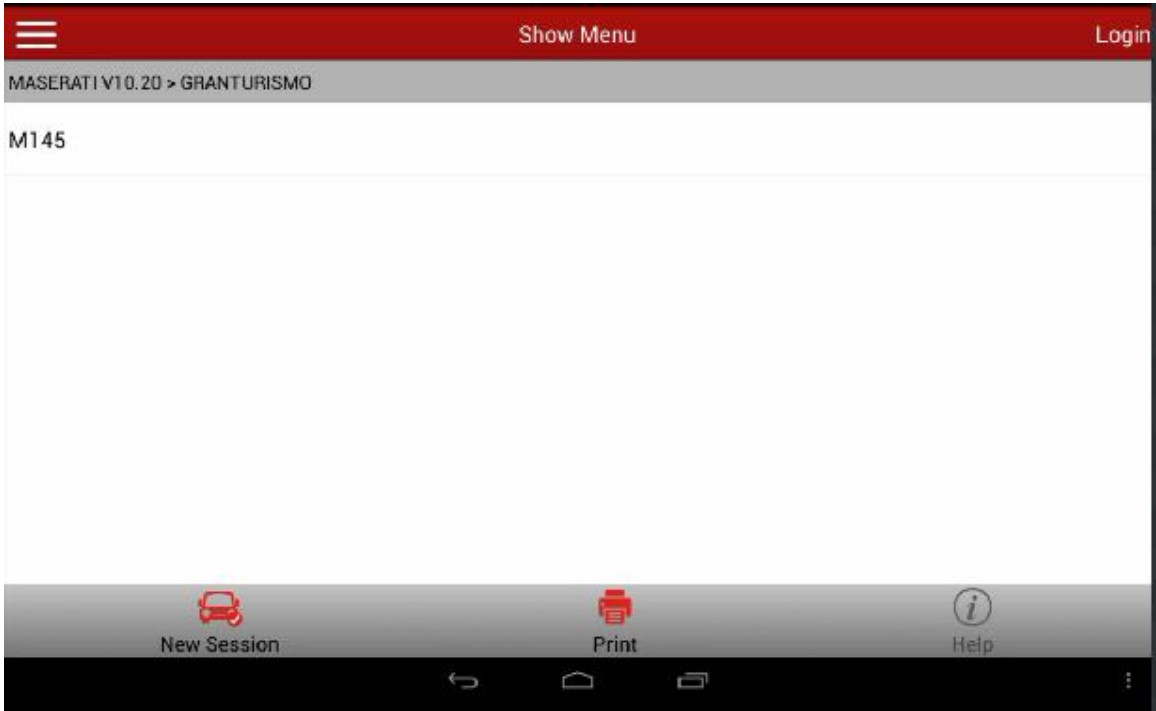


6. Select the Gasoline;

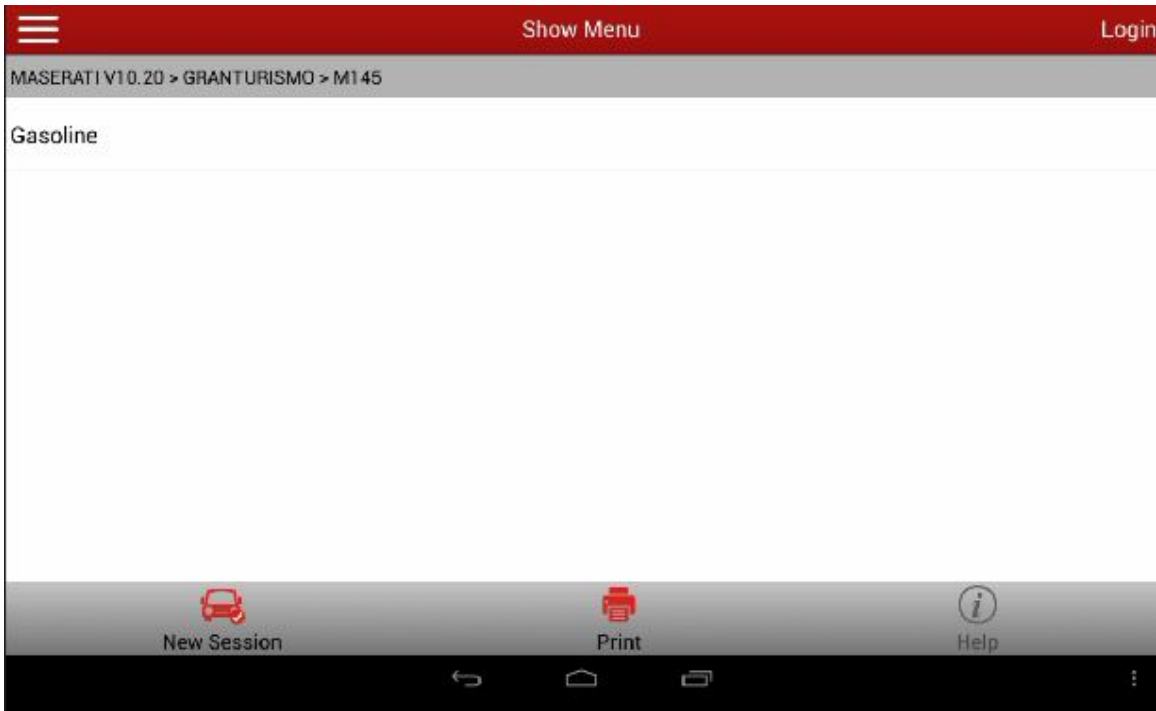


7. Select the System Scan;

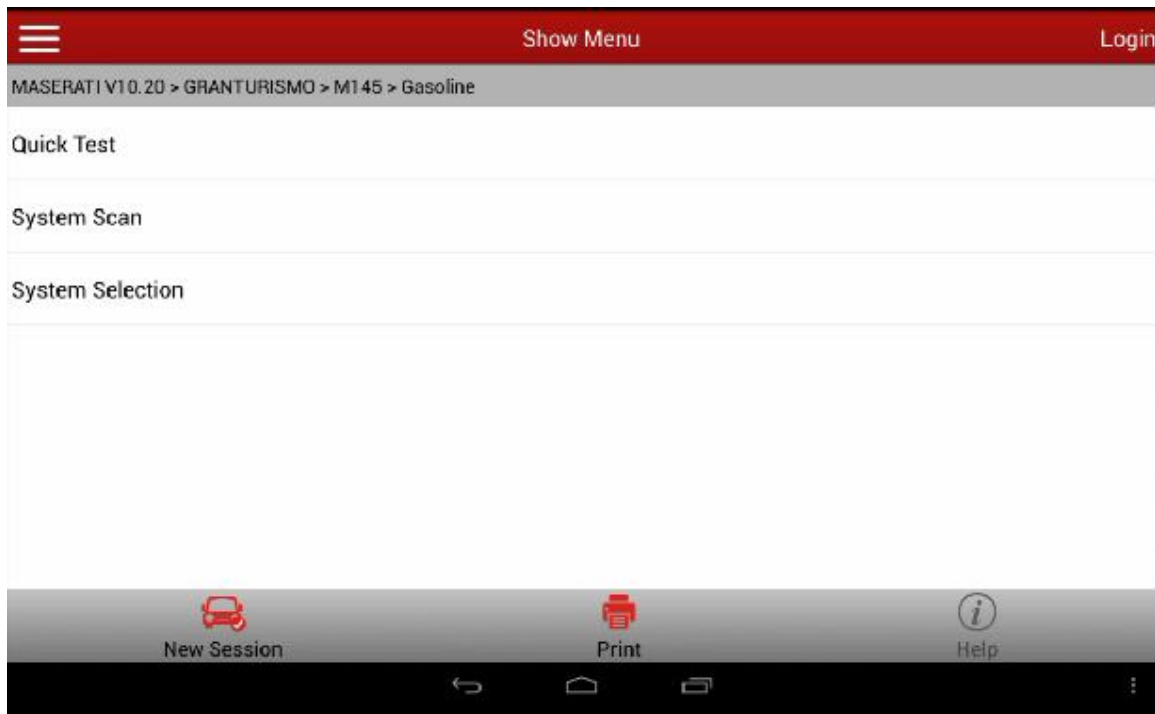

8. Select the Marelli Instrument Cluster;

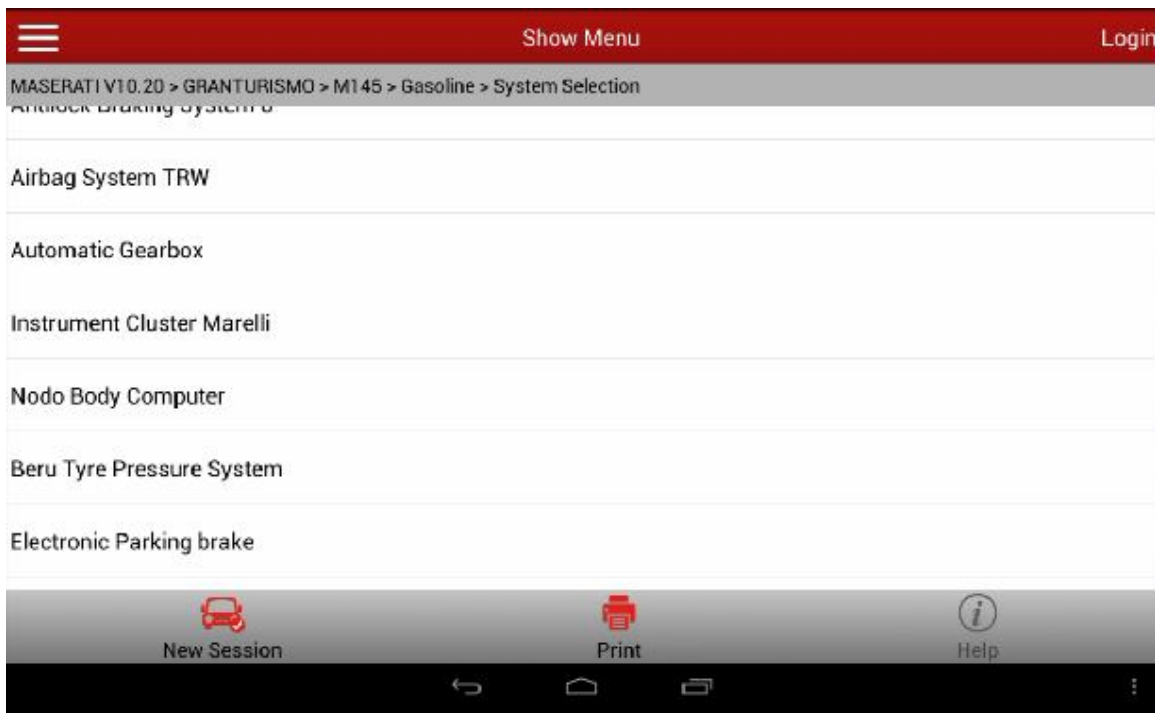


9. Read out the ECU ID, and select Confirm;

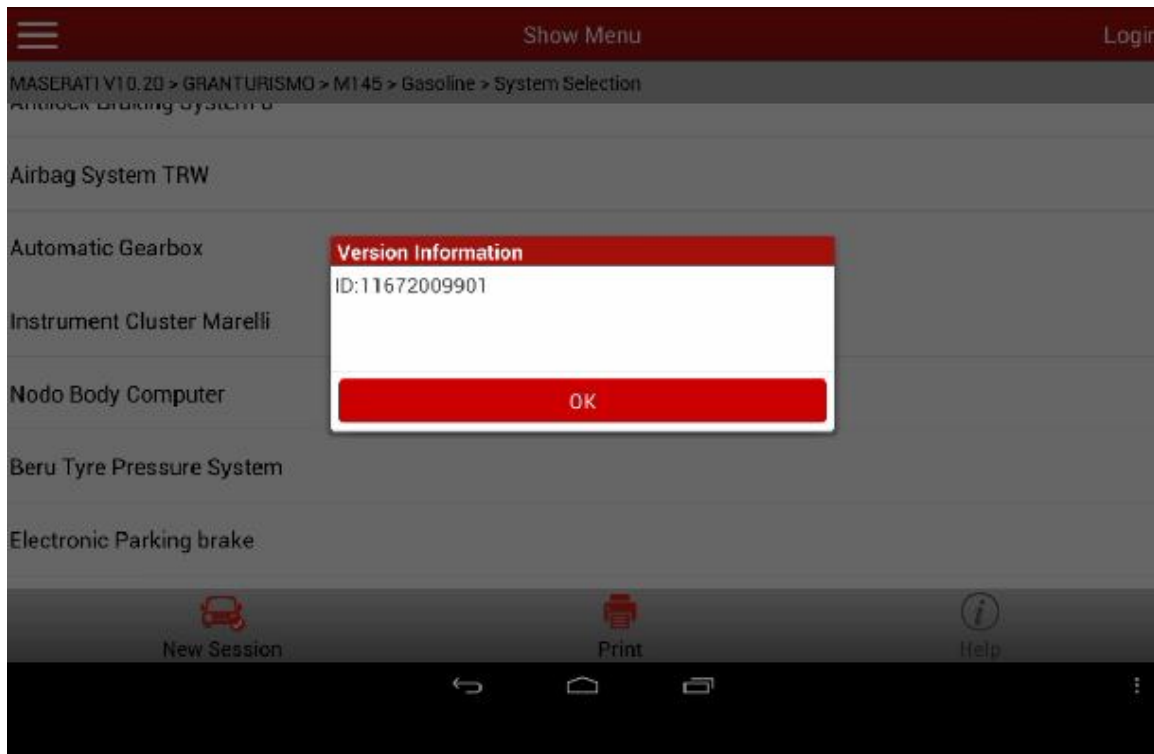


10. Select the Special Function;




11. Select the Service Info Reset;

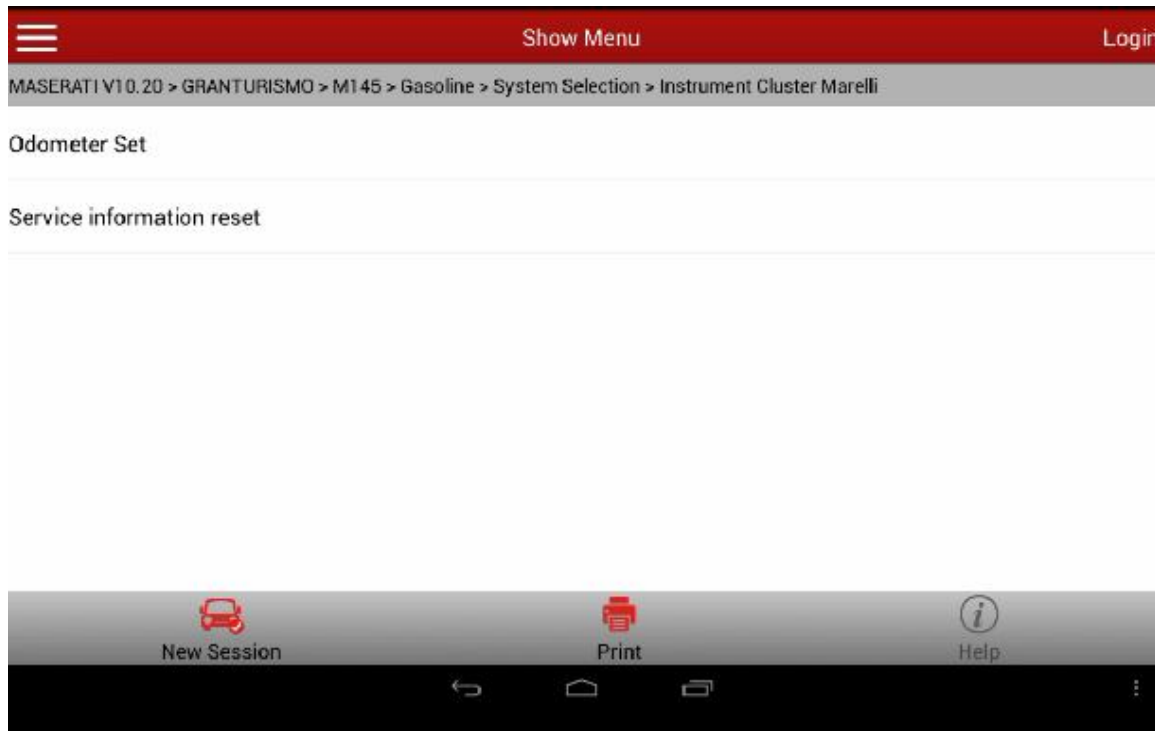

12. Pay attention to the reset service hints to ensure the date on the instrument cluster is set correctly;

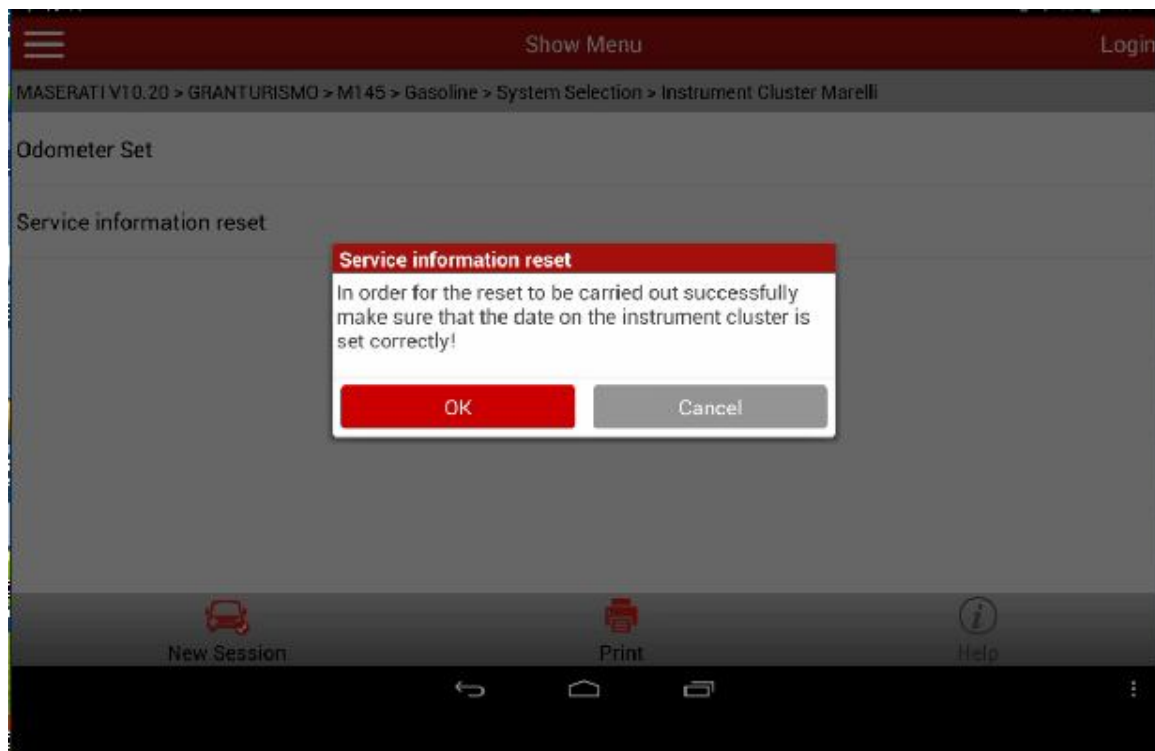

13. After confirmed, it indicates "Procedure completed", then the operation ended.

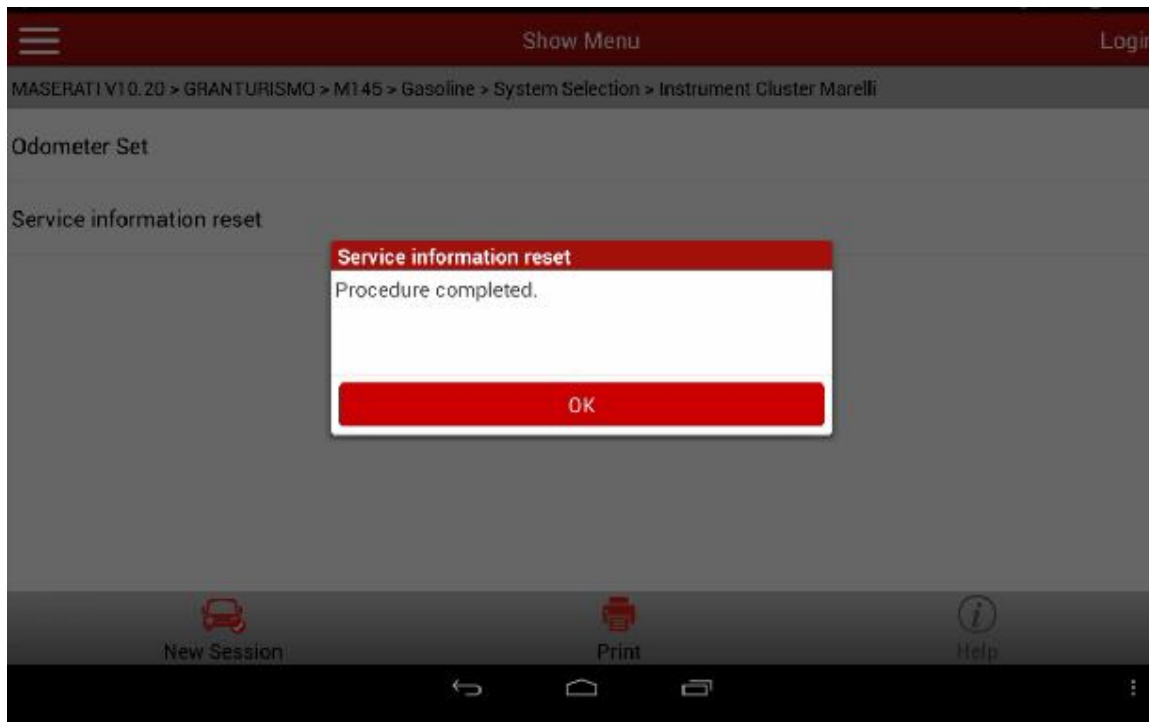

LAUNCH is dedicated to pursuing good functions and addressing customer needs. Follow LAUNCH, you will "make a little progress every day"!

