


【 X431 Actual Measurement 】 2012 Fujian Benz VIANO/ Zero maintenance lamp.

Actual Measurement

Benz Commercial vehicle VIANO/, 2012, VIN=LB1WA6885C80*****

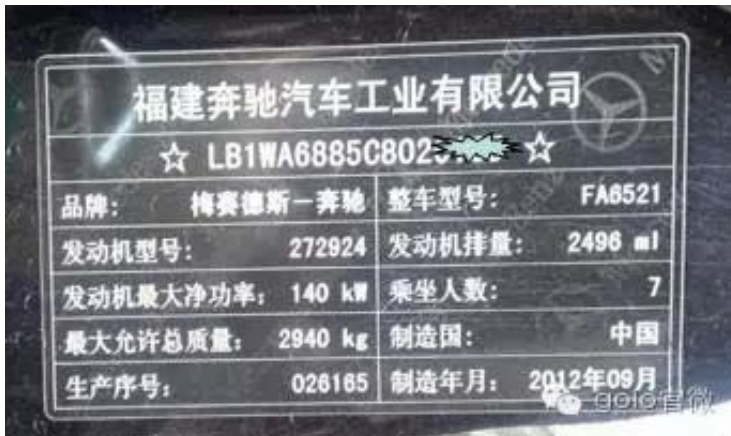


Note:


1. Before executing function, please switch on the ignition, not start the engine.
2. After executing the function, switch off the ignition, waiting for 10s, switch on the ignition again.

Operation Procedure


1. Switch on the ignition, not start the engine;
2. Select zero maintenance lamp V10.30 above;
3. Select “MERCEDES-BENZ” menu, see as pic1;

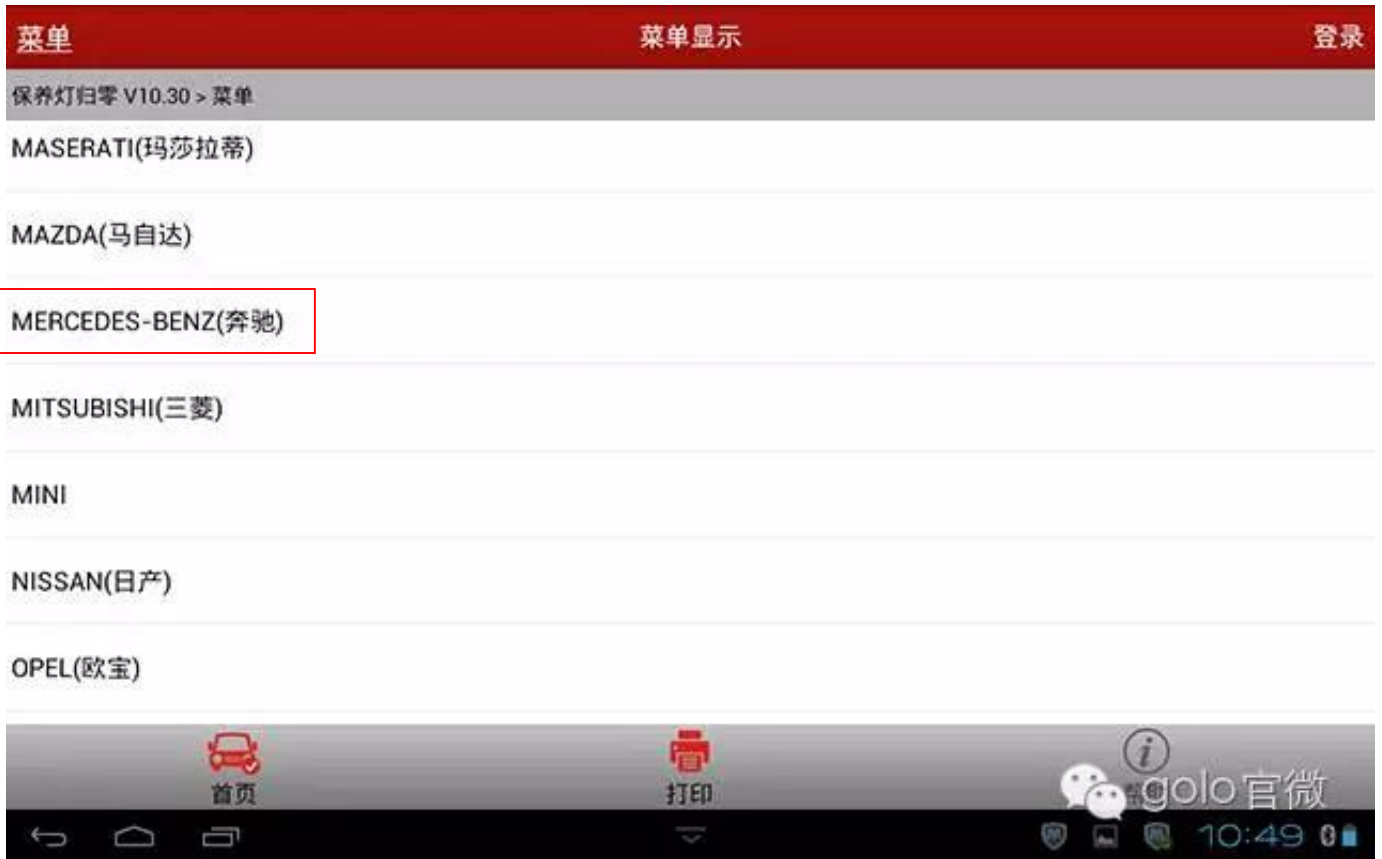

4. Select “Commercial Vehicle” see as pic2;

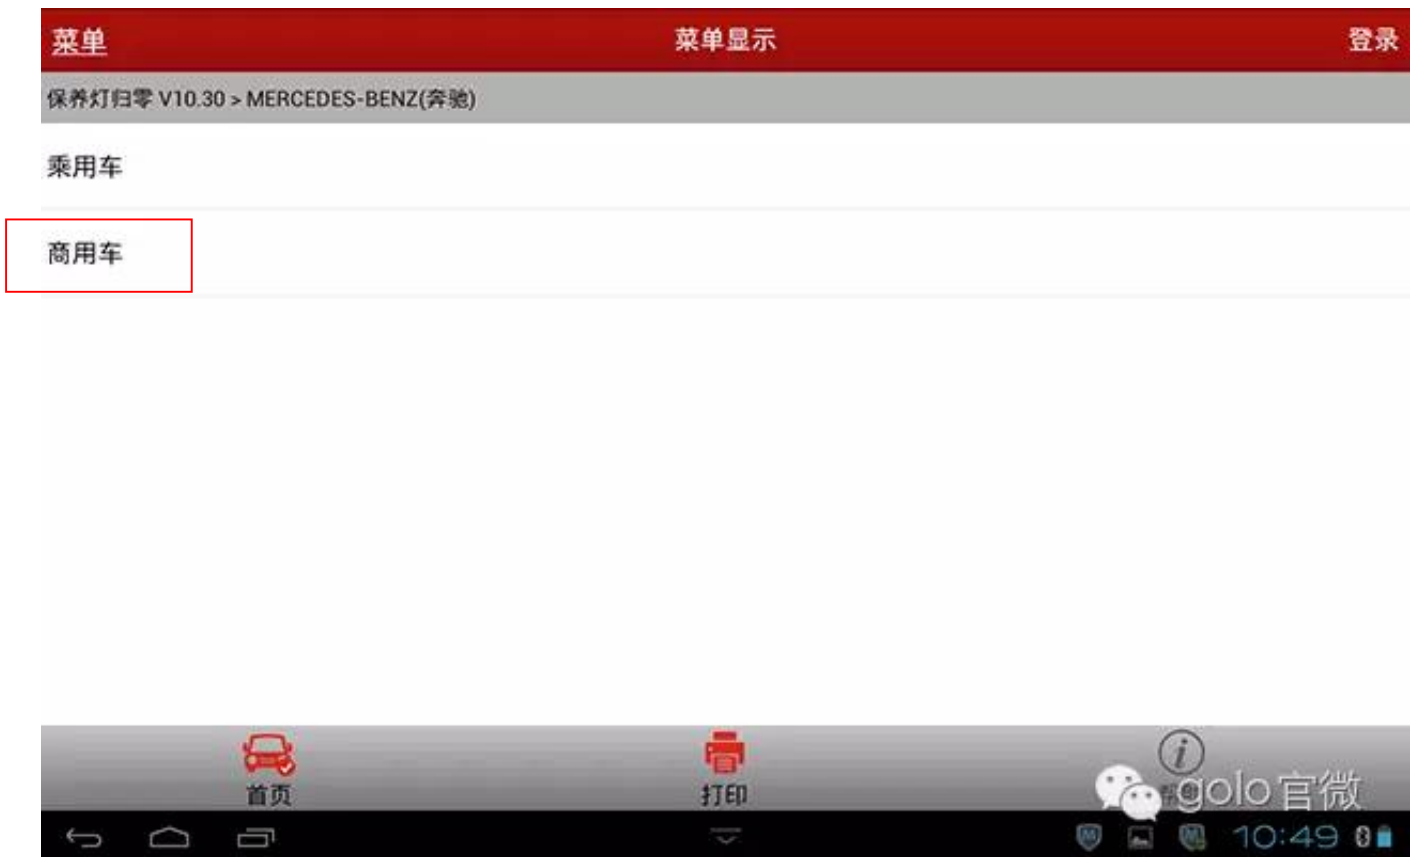

Pic2

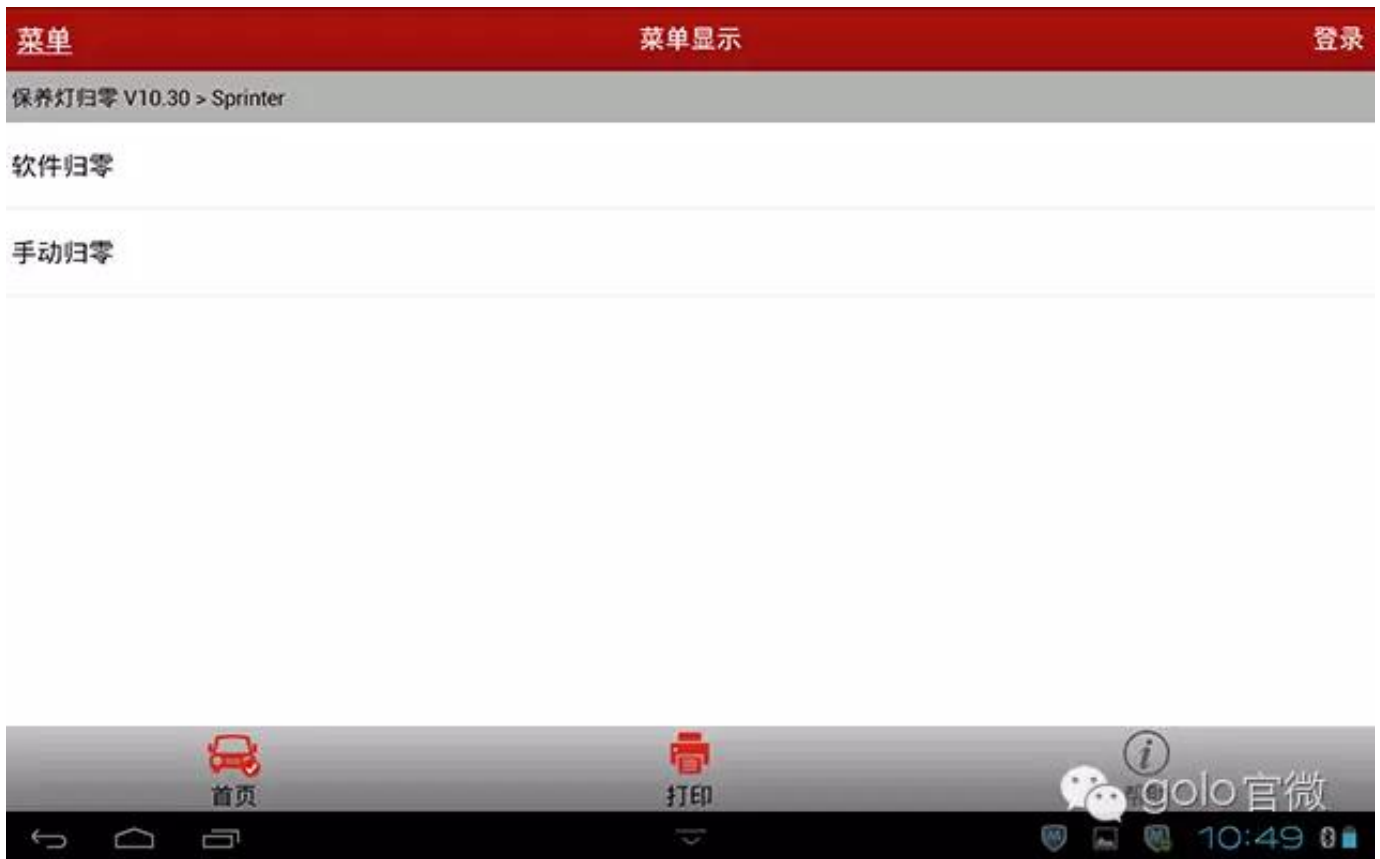


pic3

6. Select “VIANO 639” menu, see as pic4.




Pic4

7. Select Car Model Year ,see as pic 5;

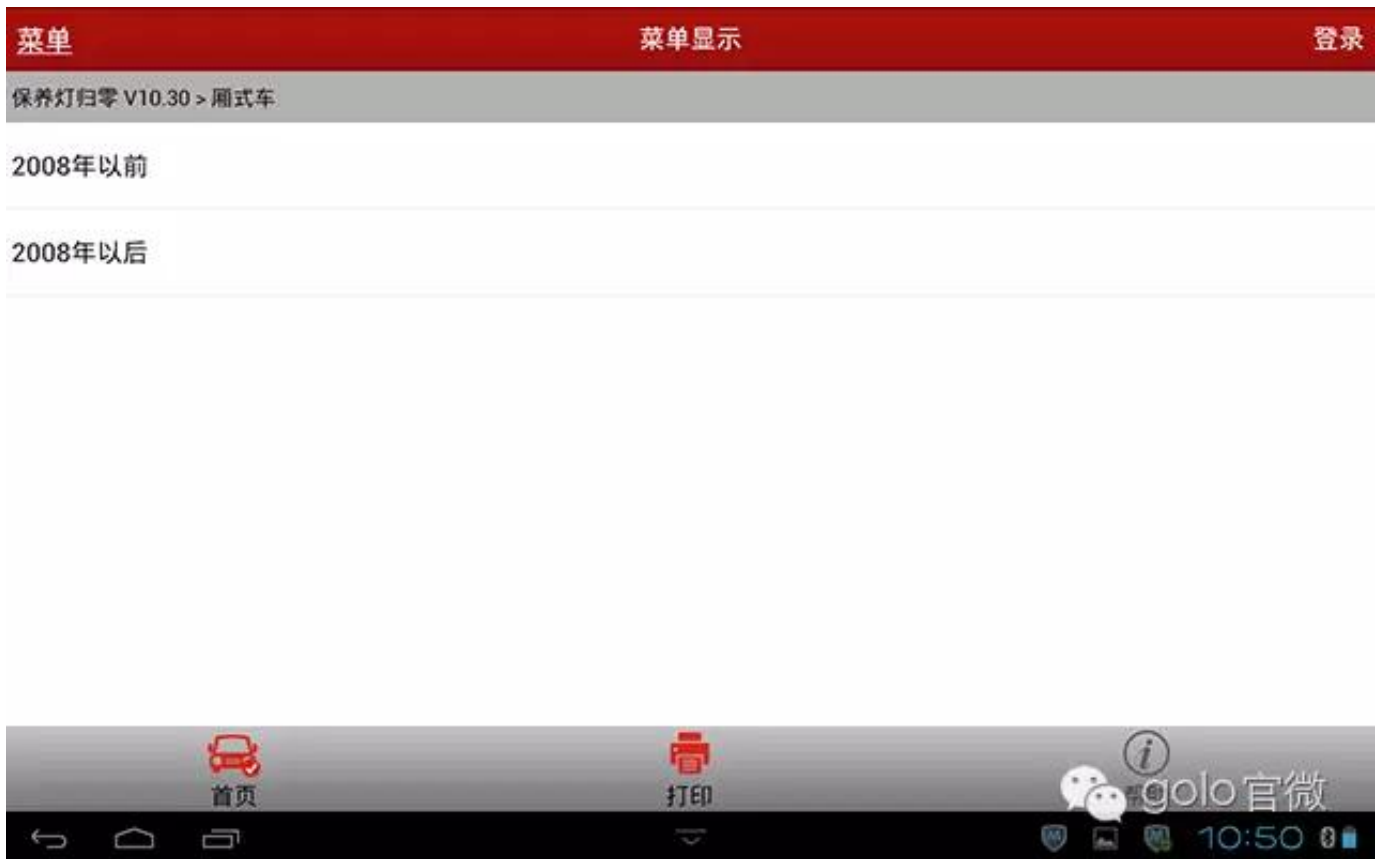

Pic5

8. Select one of the annual menu, will be prompted to turn on the ignition switch, turn on the ignition switch to prompt the communication, please wait a moment... After about 1 second, the "oil change" function menu is displayed, as shown in FIG. 6;

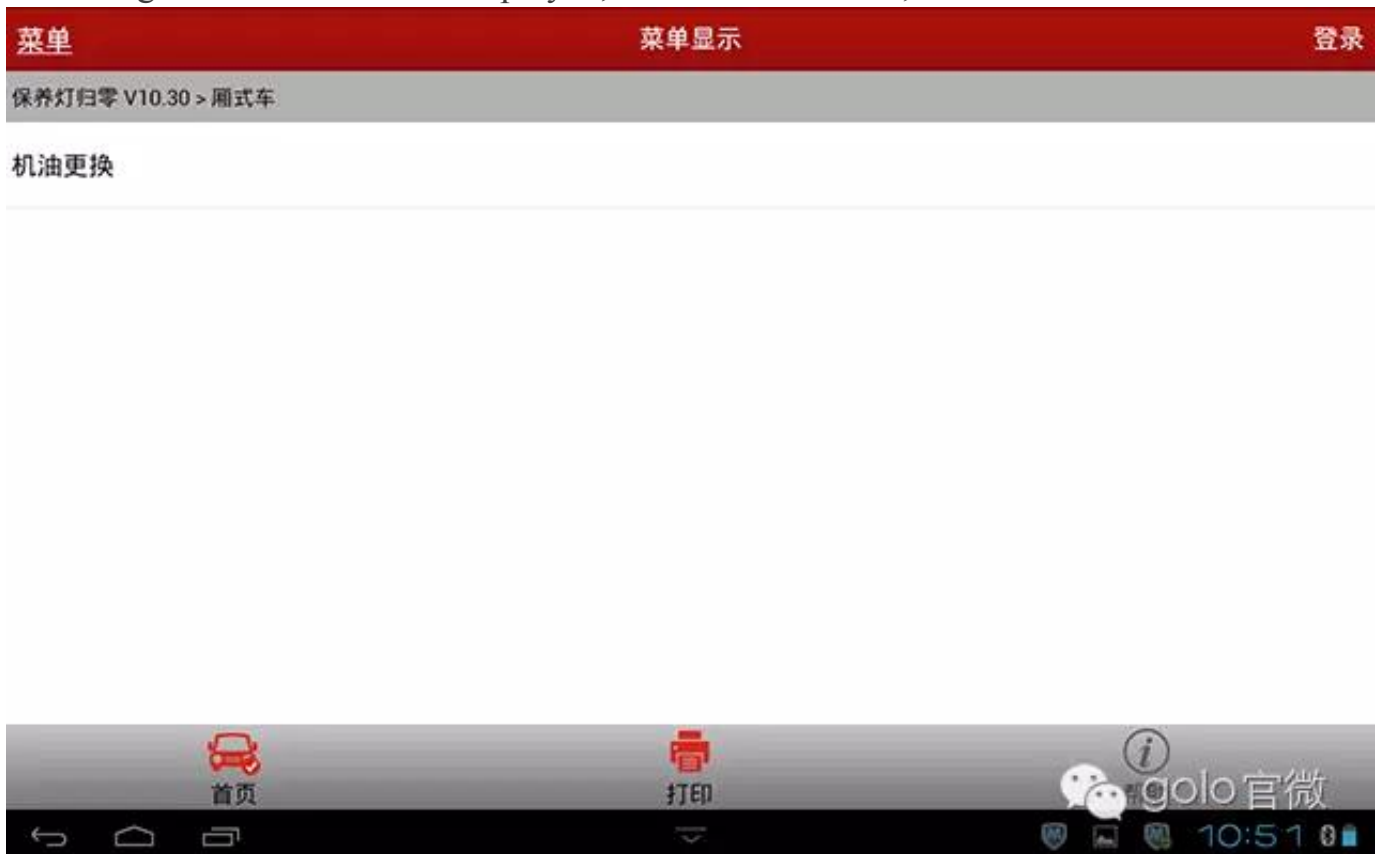

Pic6

9. Select the "oil replacement" menu, display the figure 7, according to the changed oil level (model), press the function key F3 or F4;



Pic7

10. The following will prompt "this feature is successfully executed" and the point determination is completed, as shown in figure 8. Note: if you do this before the maintenance light is on, then the function after successful completion of the need to turn off the ignition wait a few seconds and then opens the ignition and maintain lamp will go out, at the same time, the instrument shows remaining mileage or remaining time will change.



Pic8



长按指纹“识别二维码”关注 **golo** 官微